


Secure | Certified | Connected



# Secure Peripheral Switching Solutions

Common Criteria Certified to NIAP Protection Profile for Peripheral Sharing Devices Version 4.0 base PSD

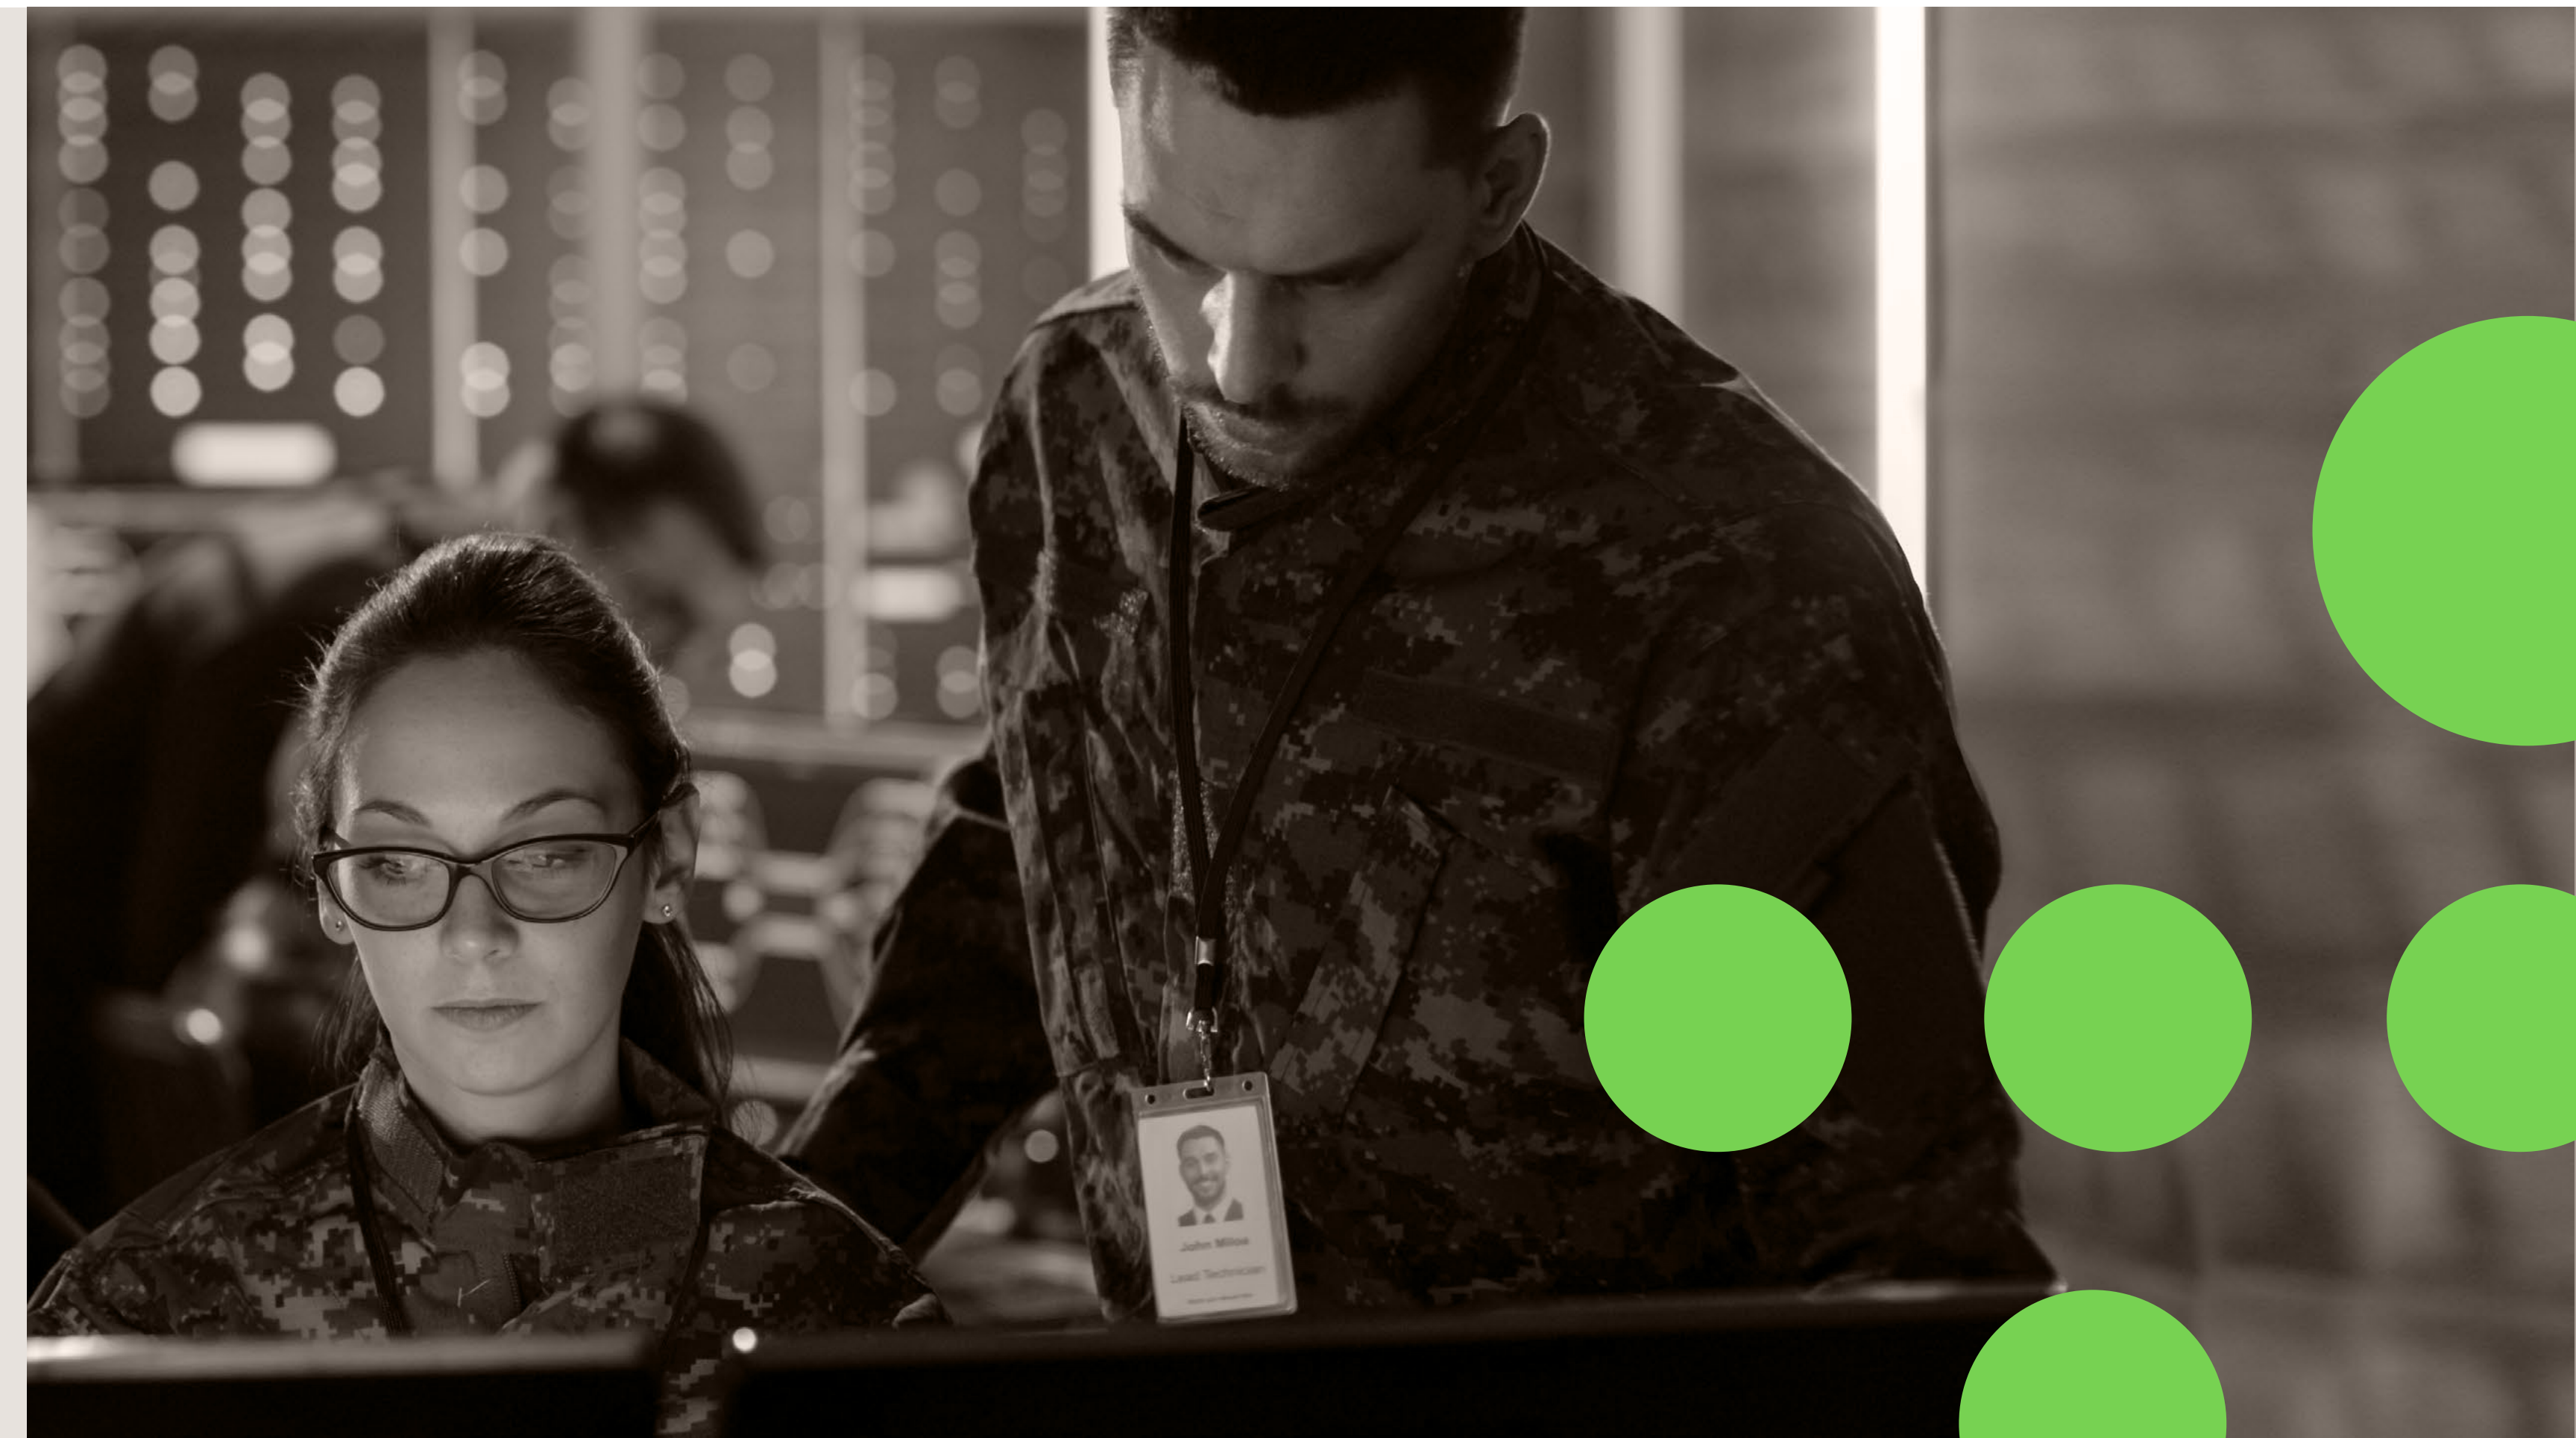





## Secure Peripheral Switching Solutions



## Content

The Solution .....	3
Modular sKVMs .....	4
Modular sKMs .....	9
Universal sKVM 2 <sup>nd</sup> Generation .....	11
Contact .....	17



# The Solution

Belkin offers the latest Common Criteria

**NIAP Protection Profile 4.0- certified** peripheral sharing devices designed to maintain air-gap isolation with the desktop while improving operator efficiency and effectiveness.

## The ultimate security solution

All Belkin Secure Switching Products are equipped with advanced cybersecurity provisions including:

- Optical data diodes assuring unidirectional data flow from each peripheral.
- Device emulation and filtering of connected USB devices.
- Secured EDID emulation ensuring protection of connected monitors.

## Tamper-proof system

All Belkin secure switching products are equipped with an end-to-end tamper-proof system including:

- A holographic security tamper-evident label on the switch enclosure to indicate if the product has been opened or compromised.
- The advanced Universal 2nd Gen Secure KVMs include an always-on, battery-backed, active anti-tamper circuit that protects the unit while in transit and after deployment.
- The Universal 2nd Gen Secure KVMs ship in tear-away packaging to ensure the integrity of the unit throughout the supply chain.



# Modular sKVMs

Belkin's Modular sKVMs are designed and built for government and military agencies around the world to safeguard critical data and computer systems.



While *only slightly larger than a modern smartphone*, our Modular Series of secure KVMs and KM's meet all critical security constructs to ensure air-gap isolation and system security in the smallest form factor on the market.

Universal video compatibility, innovative mounting options, and an included remote control allow administrators to declutter the operator's desk without jeopardising control and access.


- Smallest form factor for 2- or 4-port secure KVM.
- Universal video compatibility.
- Included remote control supports KVM switching while decluttering the desk.
- Optional mounting hardware supports VESA and under-the-desk mounting.
- Certified for NIAP Protection Profile 4.0 to meet the highest security standards.
- TAA compliant, assembled in the USA.
- Dedicated US-based free technical support.

# Free up your desk

With a 94% smaller footprint than other KVMs, the Modular sKVM Series is designed to take up as little desk space as possible while adhering to NIAP PP PSD 4.0 requirements.

Optional mounting choices and the included remote control combine to help declutter the desk while enhancing operator ergonomics in even the most cramped work environments.

*Versatile ports fit HDMI, mDP, DP, DVI-D, USB-C and VGA connectors.*

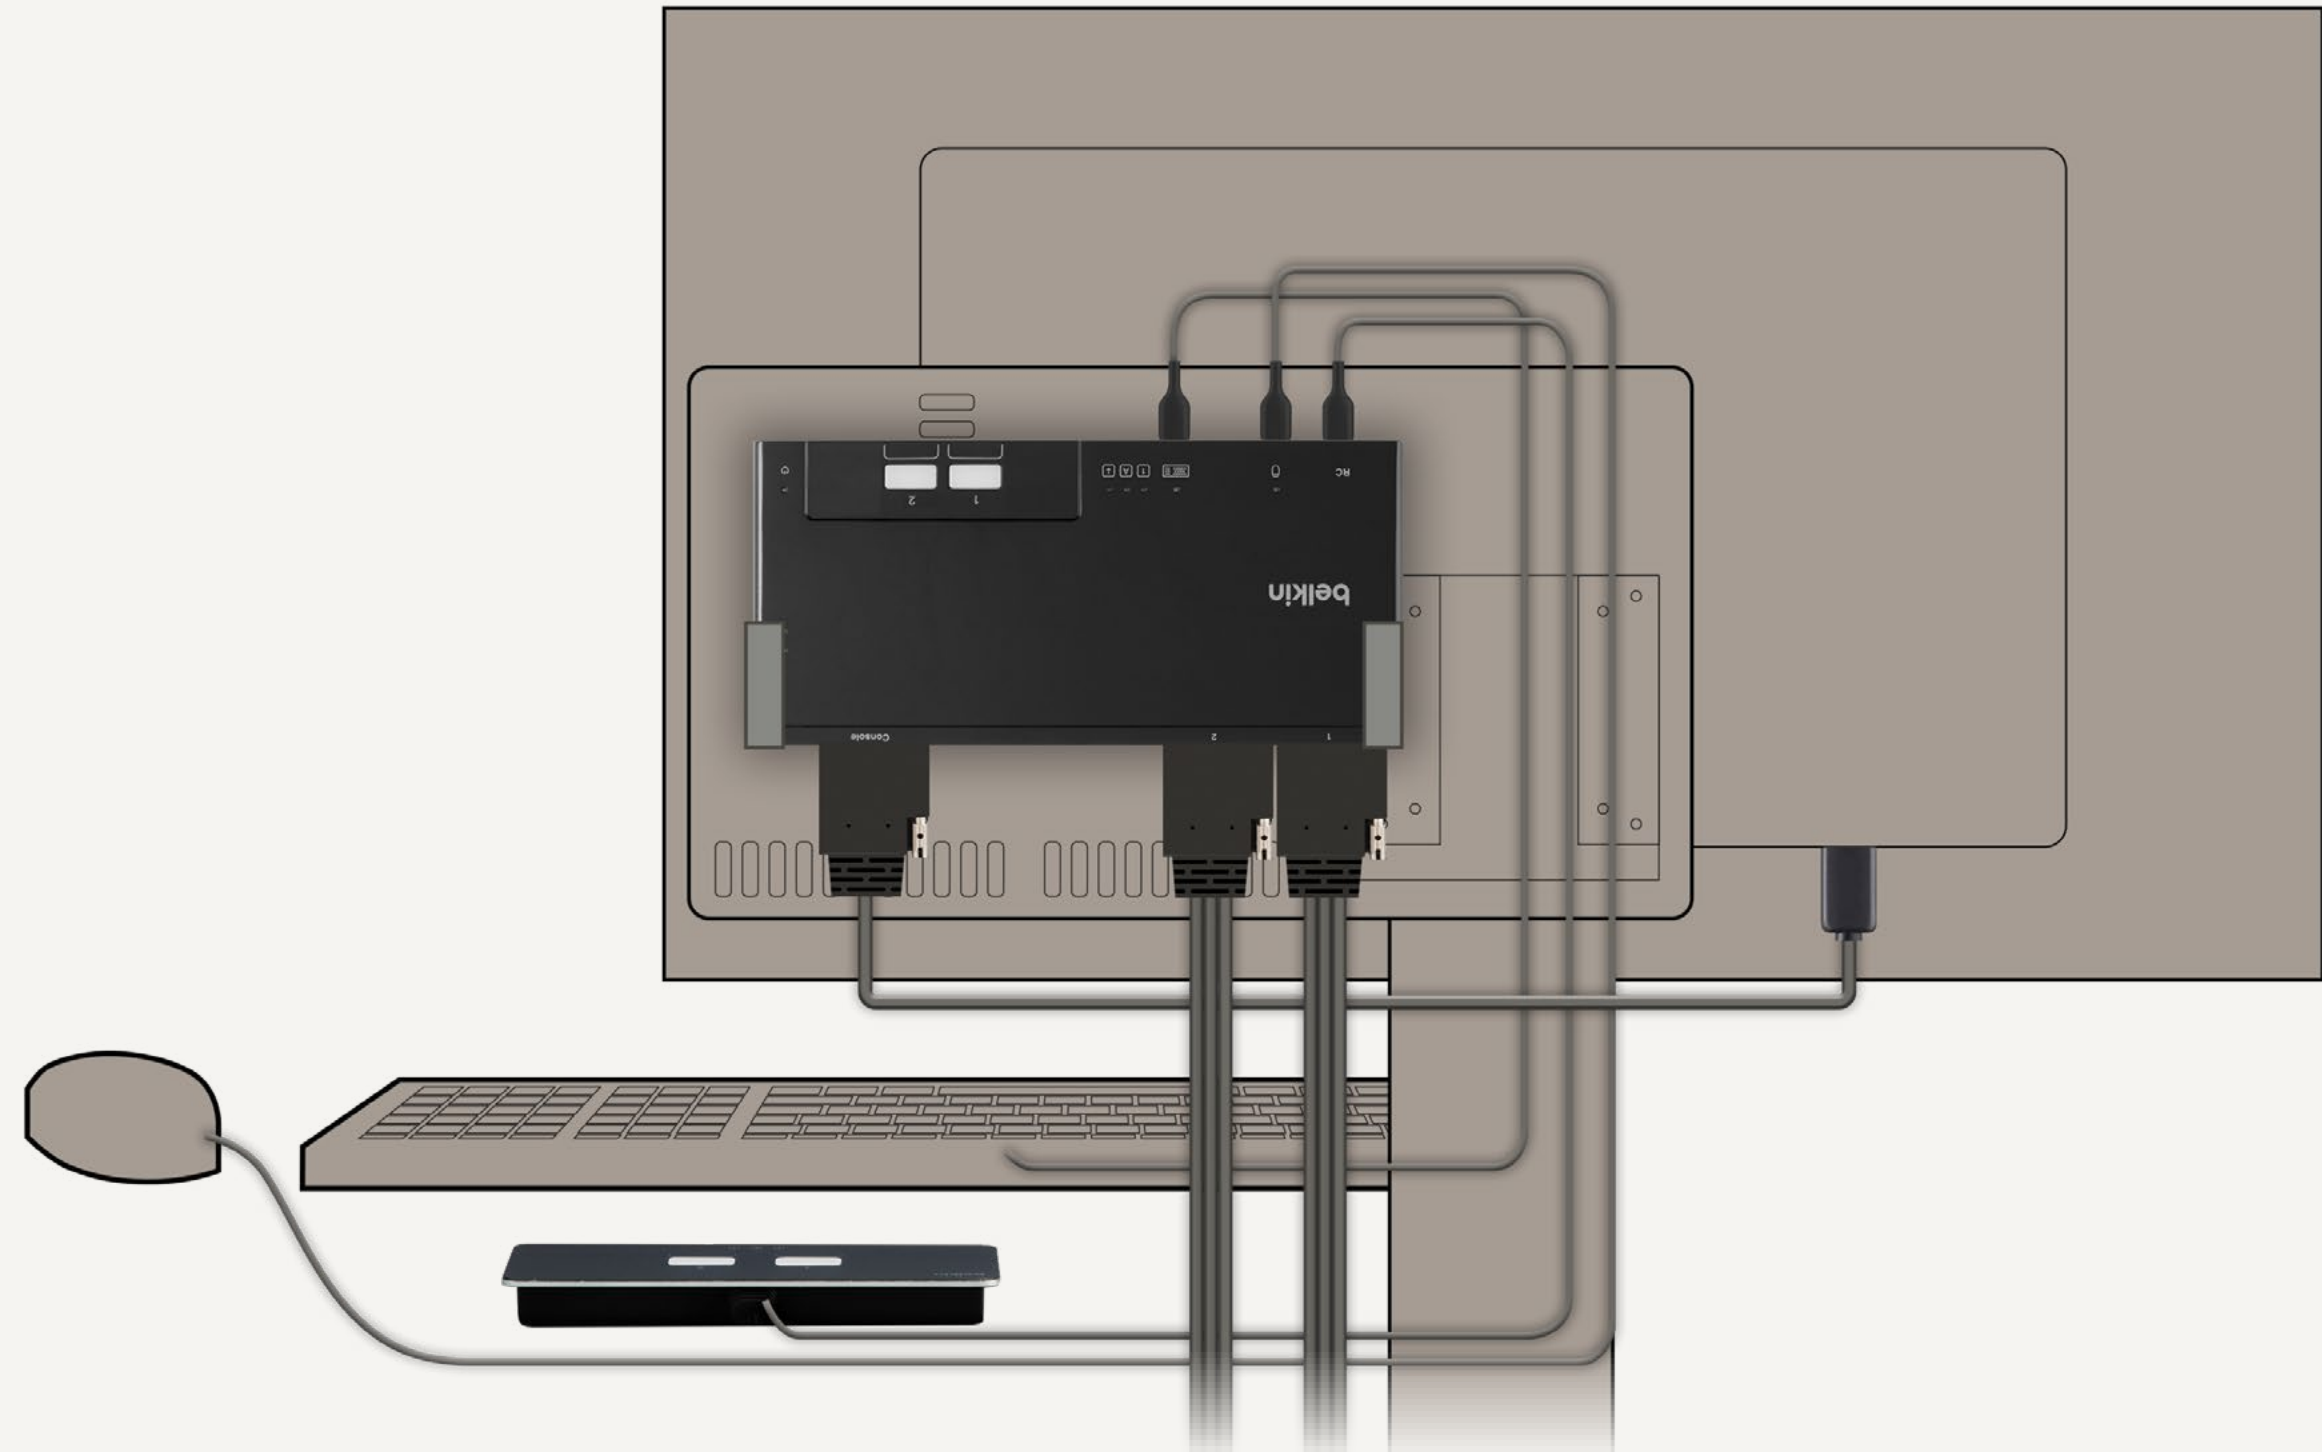

2-Port, Single-Head  
Modular Secure KVM Switch w/Remote

**F1DN102MOD-BA-4**



2-Port, Dual-Head  
Modular Secure KVM Switch w/Remote

**F1DN202MOD-BA-4**



4-Port, Single-Head  
Modular Secure KVM Switch w/Remote

**F1DN104MOD-BA-4**



4-Port, Dual-Head  
Modular Secure KVM Switch w/Remote

**F1DN204MOD-BA-4**





Modular sKVMs

PART NUMBER		NUMBER OF COMPUTERS	NUMBER OF DISPLAYS	CONSOLE & COMPUTER VIDEO PORT	INTEGRATED CONSOLE (VIDEO) CABLE	INTEGRATED COMPUTER CABLE
F1DN102MOD-PP-4		2	1	DisplayPort	1.8 m single-monitor	2x 1.8 m Video and USB
F1DN202MOD-PP-4		2	2		1.8 m dual-monitor	
F1DN104MOD-PP-4		4	1		1.8 m single-monitor	4x 1.8 m Video and USB
F1DN204MOD-PP-4		4	2		1.8 m dual-monitor	
F1DN102MOD-DD-4		2	1	DVI	1.8 m single-monitor	2x 1.8 m Video and USB
F1DN202MOD-DD-4		2	2		1.8 m dual-monitor	
F1DN104MOD-DD-4		4	1		1.8 m single-monitor	4x 1.8 m Video and USB
F1DN204MOD-HH-4		4	2		1.8 m dual-monitor	
F1DN102MOD-HH-4		2	1	HDMI	1.8 m single-monitor	2x 1.8 m Video and USB
F1DN202MOD-HH-4		2	2		1.8 m dual-monitor	
F1DN104MOD-HH-4		4	1		1.8 m single-monitor	4x 1.8 m Video and USB
F1DN204MOD-HH-4		4	2		1.8 m dual-monitor	
F1DN102MOD-HH-4	(BASE)	2	1	HDMI	Optional cables to provide DP, DVI, HDMI, mDP, VGA	Optional cables to provide DP, DVI, HDMI, mDP, VGA, USB-C w/USB to support keyboard, video & mouse
F1DN202MOD-BA-4	(BASE)	2	2			
F1DN104MOD-BA-4	(BASE)	4	1			
F1DN204MOD-BA-4	(BASE)	4	2			

**Security Accreditation:**  
NIAP Protection Profile PSD Ver. 4.0,  
Audio Input v 1.0. Keyboard/Mouse v 1.0. Video/Display v 1.0TEMPEST variants  
available via an SDIP-55 NATO accredited TEMPEST test facility

**Regulatory Compliance:**  
FCC Class A, CE, UL, ICES, RCM, RoHS, UKCA

**General Information**  
Designed in California. Assembled in USA with USA-based technical support  
(TAA compliant)

**Product Life-Cycle:** 5 years

**Warranty:** 3 years standard (upgradeable to 4 or 5 years)

**Enclosure:** Diecast aluminum

All Models

**Max Resolution Supported**  
3840 x 2160 pixels (UHD 4K) @ 30Hz  
2560 x 1600 pixels @ 30Hz

**Computer Keyboard/Mouse Port**  
USB Type A

**Console Mouse and Keyboard Ports**  
USB Type-A female connector with  
status indicator lights  
(1 designated port for mouse and 1 designated port  
for keyboard)

**Console Remote Control Port**  
USB Mini (female)

**Physical Dimensions (w/out cables)**  
W x D x H: 90 x 190 x 15 mm  
Weight: 0.25 kg

**Power**  
Requirements: 12V, 2.5A DC  
AC Input: 100–240VAC  
Power Type: External with WW mains connectors

**Temperature**  
Operating: 0° to 40° C  
Storage: -20° to 60° C

**Humidity**  
Storage & Use: 0-80% RH, non-condensing



Modular sKVM      Accessories

PART NUMBER	INTEGRATED CONSOLE (VIDEO) CABLE
F1DN-MOD-VMOUNT	Belkin Modular KVM/KM VESA Mount
F1DN-MOD-MOUNT	Belkin Modular KVM/KM Under-Desk Mount
F1DN1MOD-EXT-04	Belkin Modular Single-Head Host or Console Extension Cable, 1,2 m.
F1DN2MOD-EXT-04	Belkin Modular Dual-Head Host or Console Extension Cable, 1,2 m
F1DN-MOD-CEXTC5	Belkin Modular KVM Console Side CAT5 Extender
F1DN-MOD-HEXRC5	Belkin Modular KVM Host Side CAT5 Extender
F1DN-MOD-CEXTFI	Belkin Modular KVM Console Side Fiber Extender
F1DN-MOD-HEXRFI	Belkin Modular KVM Host Side Fiber Extender

Modular sKVM      Replacement Parts

PART NUMBER	INTEGRATED CONSOLE (VIDEO) CABLE
0401-00811	Belkin Modular KVM/KM Power Adapter 12V 2.5A, w/Interchangeable Mains Connector Wall Mount
F1DN-MOD-REM2	Belkin Modular KVM/KM Replacement Remote Control, 2 Port
F1DN-MOD-REM4	Belkin Modular KVM/KM Replacement Remote Control, 4 Port





Modular sKVM      Single-Head Cables

Console

PART NUMBER		
F1DN1MOD-CC-H06	HDMI Single-Head Console Cable	1,8 m
F1DN1MOD-CC-P06	DisplayPort Single-Head Console Cable	1,8 m
F1DN1MOD-CC-D06	DVI Single-Head Console Cable	1,8 m
F1DN1MOD-CC-V06	VGA W/Audio Single-Head Host Cable	1,8 m
F1DN1MOD-EXT-04	Single-Head Host or Console Extension Cable	1,2 m
F1DN1MOD-CC-H03	HDMI Single-Head Console Cable	0,9 m
F1DN1MOD-CC-P03	DisplayPort Single-Head Console Cable	0,9 m

Host

PART NUMBER		
F1DN1MOD-HC-H06	HDMI Single-Head Host Cable	1,8 m
F1DN1MOD-HC-P06	DisplayPort Single-Head Host Cable	1,8 m
F1DN1MOD-HC-D06	DVI Single-Head Host Cable	1,8 m
F1DN1MOD-HC-V06	VGA W/Audio Single-Head Host Cable	1,8 m
F1DN1MOD-HC-M06	Mini DisplayPort Single-Head Host Cable	1,8 m
F1DN1MOD-HC-U03	USB-C Single-Head Host Cable	0,9 m
F1DN-NETPWR	TAA USB-C Device Ethernet Network and Charging Adapter	
F1DN1MOD-EXT-04	Single-Head Host or Console Extension Cable	1,2 m

Modular sKVM      Dual-Head Cables

Console

PART NUMBER		
F1DN2MOD-CC-H06	HDMI Dual-Head Console Cable	1,8 m
F1DN2MOD-CC-P06	DisplayPort Dual-Head Console Cable	1,8 m
F1DN2MOD-CC-D06	DVI Dual-Head Console Cable	1,8 m
F1DN2MOD-CC-V06	VGA W/Audio Dual-Head Console Cable	1,8 m
F1DN2MOD-EXT-04	Dual-Head Host or Console Extension Cable	1,2 m
F1DN2MOD-CC-H03	HDMI Dual-Head Console Cable	0,9 m
F1DN2MOD-CC-P03	DisplayPort Dual-Head Console Cable	0,9 m

Host

PART NUMBER		
F1DN2MOD-HC-H06	HDMI Dual-Head Host Cable	1,8 m
F1DN2MOD-HC-P06	DisplayPort Dual-Head Host Cable	1,8 m
F1DN2MOD-HC-D06	DVI Dual-Head Host Cable	1,8 m
F1DN2MOD-HC-V06	VGA W/Audio Dual-Head Host Cable	1,8 m
F1DN2MOD-HC-M06	Mini DisplayPort Dual-Head Host Cable	1,8 m
F1DN2MOD-HC-U03	USB-C Single-Head Host Cable	0,9 m
F1DN2MOD-HC-U03	USB-C Dual-Head Host Cable	0,9 m
F1DN-NETPWR	TAA USB-C Device Ethernet Network and Charging Adapter	
F1DN2MOD-HC-HP6	DVI and DisplayPort Dual-Head Host Cable	1,8 m
F1DN2MOD-EXT-04	Dual-Head Host or Console Extension Cable	1,2 m



# Modular sKMs

Supporting two or four computers, the Belkin Secure Modular KM series is ideal for desktops that require multiple monitors for real-time monitoring and response. Each computer remains directly connected to its own monitor(s) while the KM switches USB keyboard and mouse control with a simple keyboard key press and cursor move to the active computer.



Modular KM units are shipped with a complete set of connecting cables and a remote-control unit, should a user desire a button push to switch the keyboard and mouse to a different computer.

- Smallest form factor for 2- or 4-port KM
- Included remote control supports KM control switching while decluttering the desk
- Optional mounting hardware supports VESA mounting and under-the-desk mounting
- Certified for NIAP Protection Profile 4.0 to meet the highest security standards
- TAA compliant, assembled in the USA
- Dedicated, USA-based free technical support



Modular sKMs

PART NUMBER	NUMBER OF COMPUTERS	INTEGRATED COMPUTER CABLE
F1DN002MOD-KM-4	2	2x 1.8 m for USB
F1DN004MOD-KM-4	4	4x 1.8 m for USB

Accessories

PART NUMBER	INTEGRATED CONSOLE (VIDEO) CABLE
F1DN-MOD-VMOUNT	Belkin Modular KVM/KM VESA Mount
F1DN-MOD-MOUNT	Belkin Modular KVM/KM Under-Desk Mount

Replacement Parts

PART NUMBER	INTEGRATED CONSOLE (VIDEO) CABLE
0401-00811	Belkin Modular KVM/KM Power Adapter 12V 2.5A, w/Interchangeable mains connector wall mount
F1DN-MOD-REM2	Belkin Modular KVM/KM Replacement remote control, 2 Port
F1DN-MOD-REM4	Belkin Modular KVM/KM Replacement remote control, 4 Port
F1DN1MOD-USB 06	Belkin Modular USB cable for KM, 1,8 m

Both Models

No. of Displays

Up to 8

Console Mouse and Keyboard Ports

USB Type-A female connector (1 designated port for mouse and 1 designated port) for keyboard with status indicator lights

Console Remote Control Port: ..... USB Mini (female)

Console Video Port: ..... None

Max Resolution Supported: ..... N/A

Computer Keyboard/Mouse Port: ..... USB Type A

Computer Video Port: ..... None

Max Resolution Supported

3840 x 2160 pixels (UHD 4K) @ 30Hz  
2560 x 1600 pixels @ 30Hz

Computer Keyboard/Mouse Port: ..... USB Type A

Console Mouse and Keyboard Ports

USB Type-A female connector with status indicator lights  
(1 designated port for mouse and 1 designated port for keyboard)

Console Remote Control Port

USB Mini (female)

Physical Dimensions (w/out cables)

W x D x H: ..... 90 x 190 x 15 mm  
Weight: ..... 0.25 kg

Power

Requirements: ..... 12V, 2.5A DC  
AC Input: ..... 100–240VAC  
Power Type: ..... External with WW mains connectors

Temperature

Operating: ..... 0° to 40° C  
Storage: ..... -20° to 60° C

Humidity

Storage & Use: ..... 0-80% RH, non-condensing

Security Accreditation:

NIAP Protection Profile PSD Ver. 4.0,  
Audio Input v 1.0. Keyboard/Mouse v 1.0. Video/  
Display v 1.0TEMPEST variants available via an  
SDIP-55 NATO accredited TEMPEST test facility

Regulatory Compliance:

FCC Class A, CE, UL, ICES, RCM, RoHS, UKCA

General Information

Designed in California. Assembled in USA with  
USA-based technical support (TAA compliant)

Product Life-Cycle: ..... 5 years

Warranty: ..... 3 years standard  
(upgradeable to 4 or 5 years)

Enclosure: ..... Diecast aluminum




# Universal sKVM 2<sup>nd</sup> Generation

Belkin's Universal 2<sup>nd</sup> Generation Secure KVM series combines cutting-edge cybersecurity provisions, video performance, and user experience to deliver a no-compromise solution for the most demanding applications.

## The colour of efficiency

Customisable port colouring & naming on the front panel of the Universal 2nd Gen facilitates channel identification and reduces operator errors.

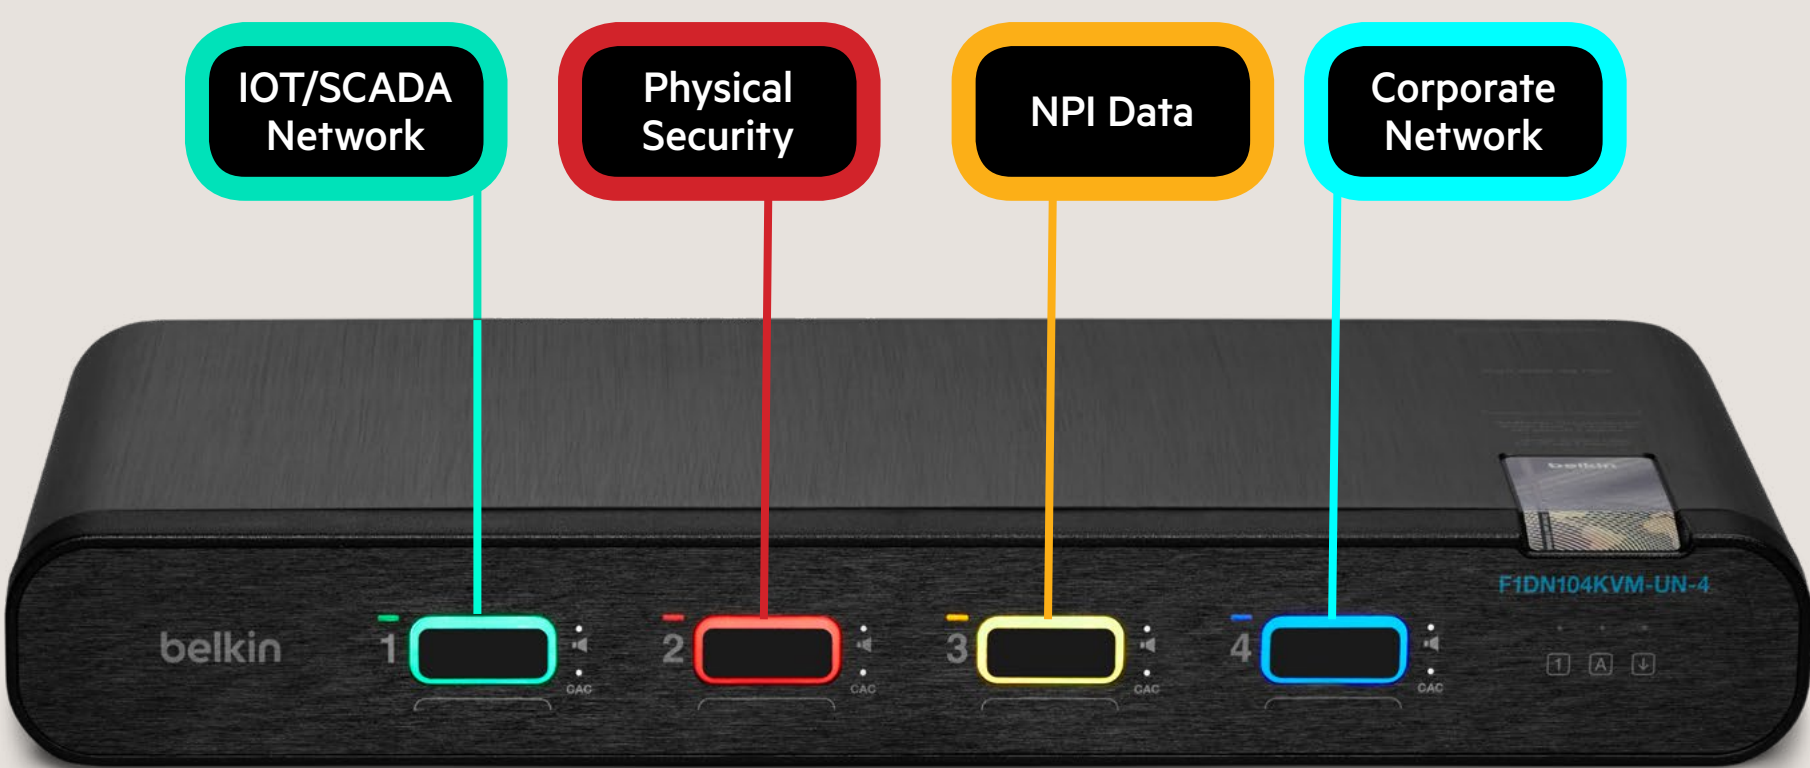

Compatible with a unique KVM Remote with Integrated Keyboard, combining the KVM channel selection with a backlit, mechanical USB keyboard reduces operator error and declutters the desktop.

## Control the KVM from the keyboard

The industry-first Belkin KVM Remote with Integrated Keyboard provides full control of the sKVM, allowing it to be located off the desk for a clean and decluttered workstation. The keyboard's LED backlighting and status indicators mimic the sKVM's front panel configuration to reinforce the security enclave the operator is working on, minimizing operator error while enhancing workspace ergonomics.






Universal sKVM 2<sup>nd</sup> Generation

Front



Back

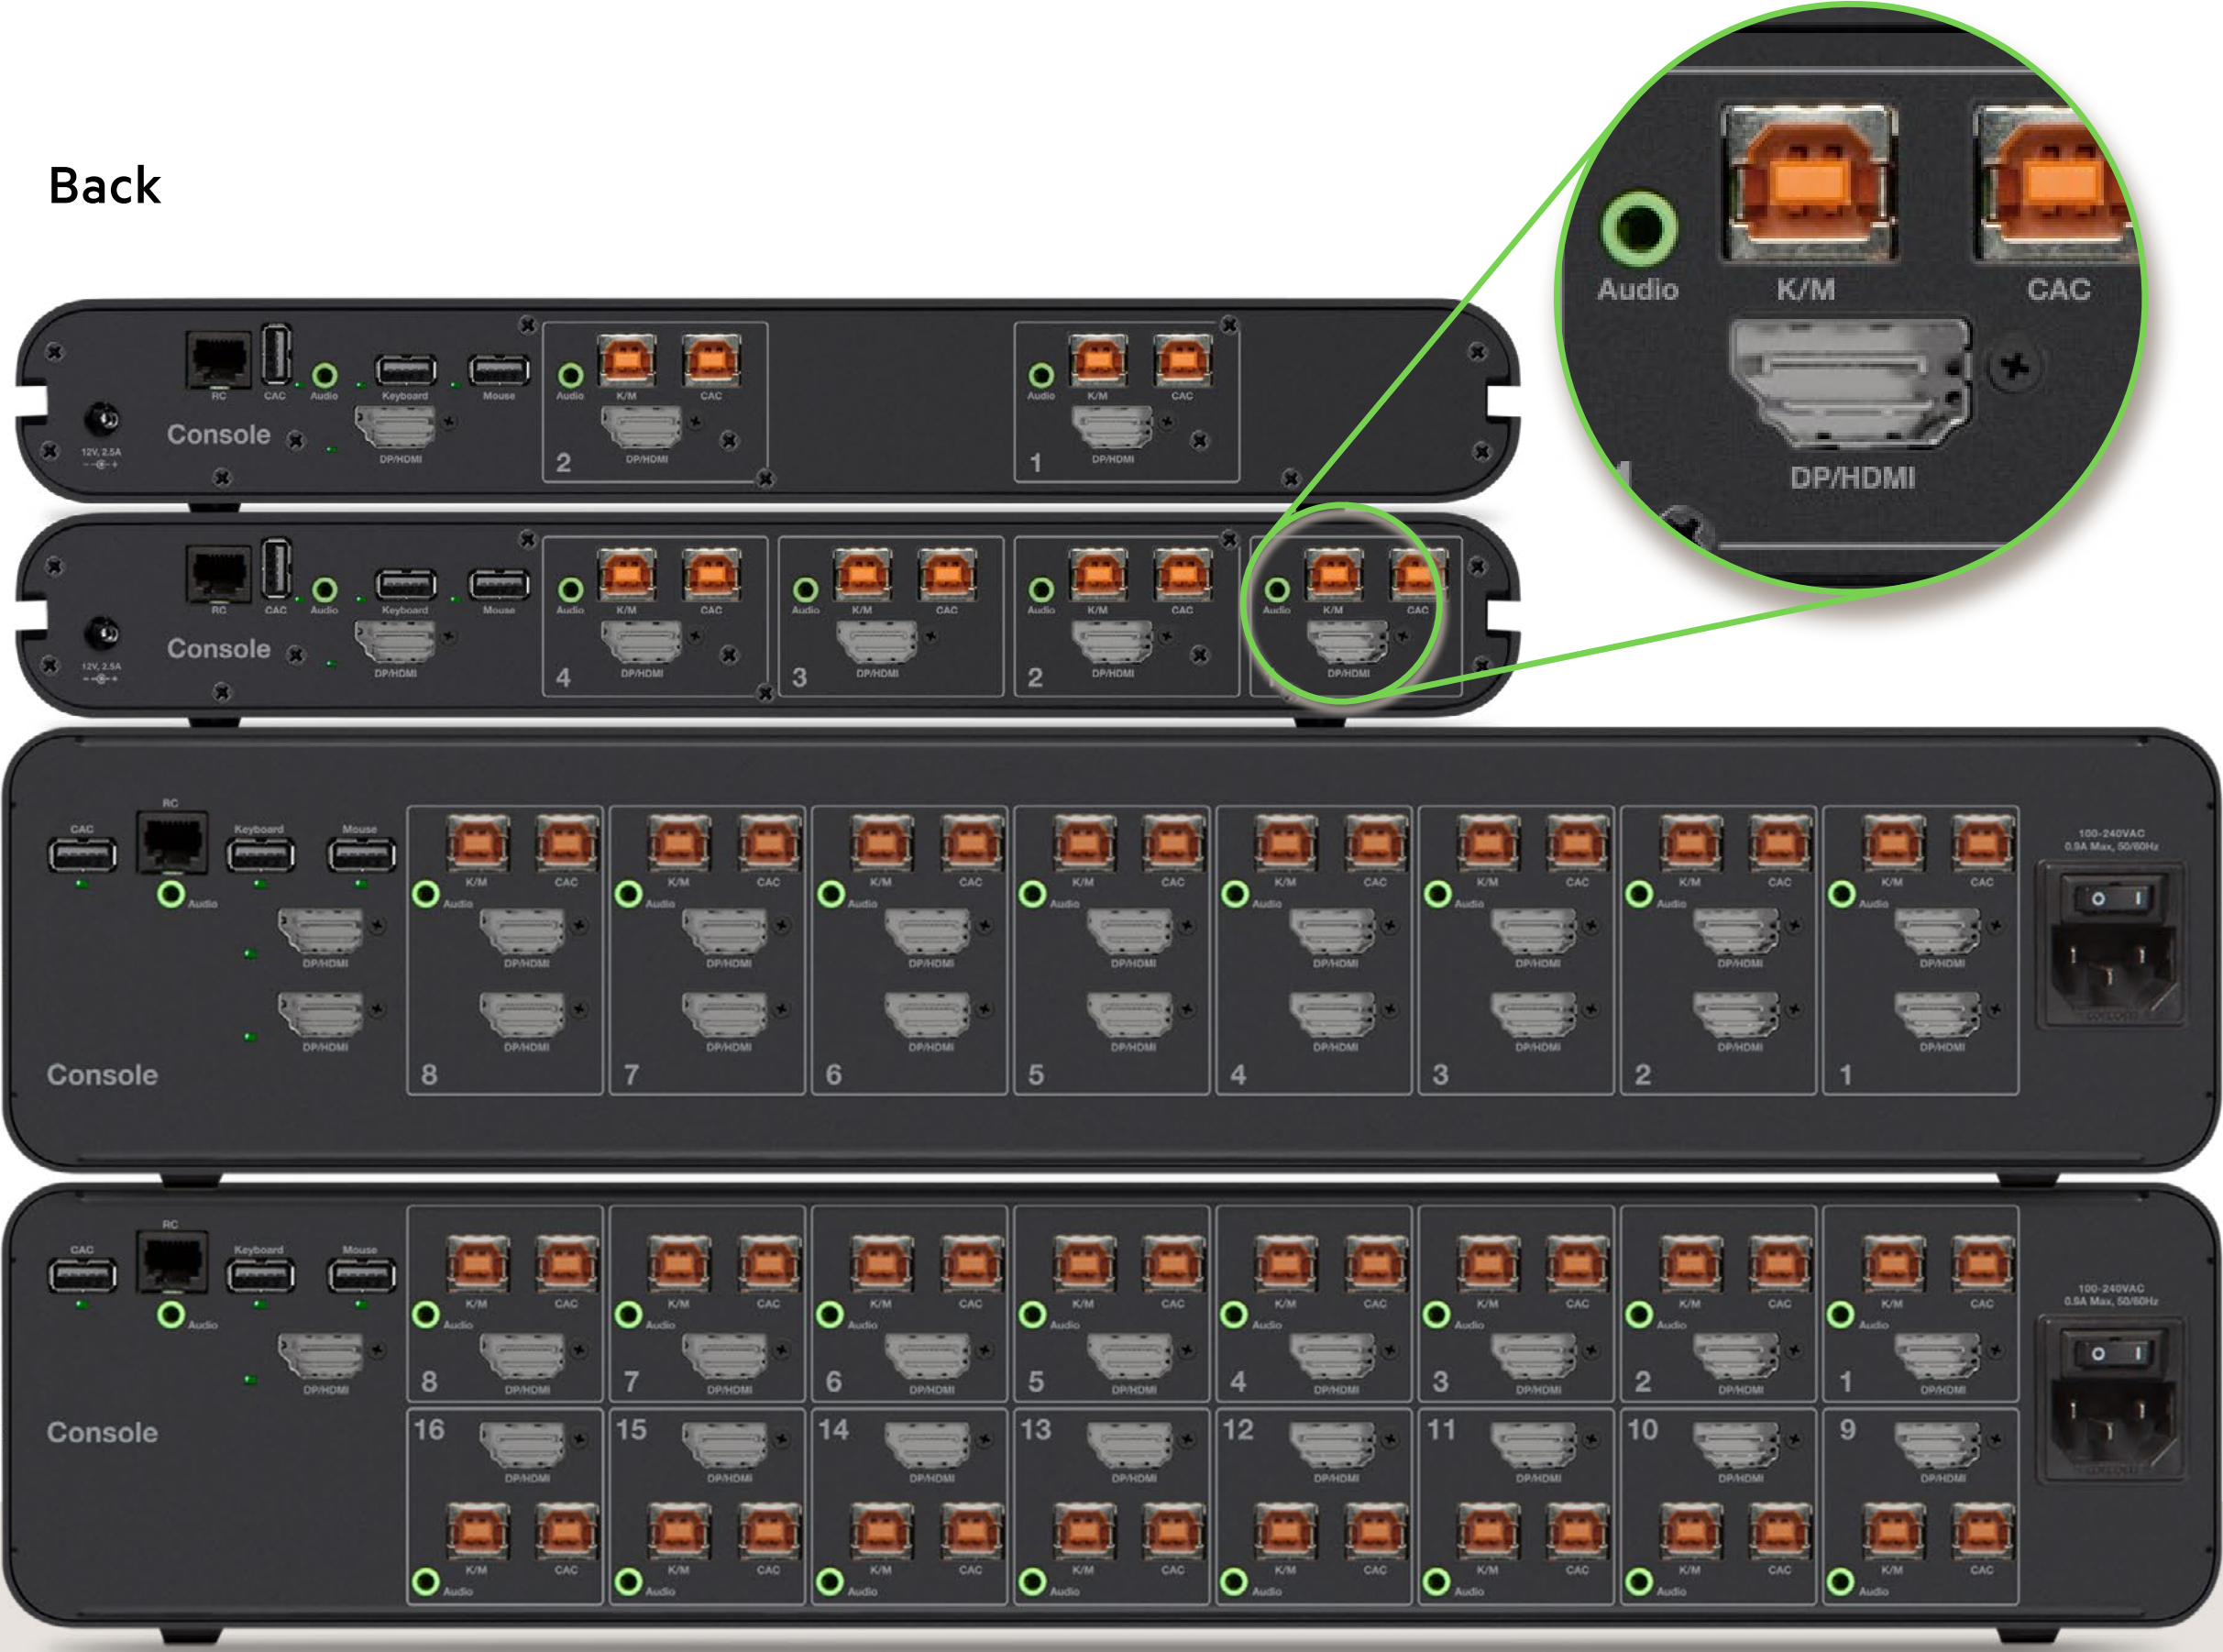

- Available in 2-, 4-, 8-, and 16-channel ports with a choice of single or dual monitors for 1-8 port models, single monitor for 16-port model.
- Future-proof design supports current and upcoming video standards at up to 4k@60Hz with optional passive and active TAA compliant cables.

- Optional sKVM remote with integrated keyboard supports full KVM switching control for the ultimate operator experience.
- Certified for NIAP Protection Profile 4.0 to meet the highest security standards.
- USA-based free technical support.





Universal sKVM 2<sup>nd</sup> Generation

PART NUMBER	NUMBER OF COMPUTERS	NUMBER OF DISPLAYS	CAC / AUDIO FREEZE	DIMENSIONS W/OUT CABLES W x D x H	POWER REQUIREMENTS	POWER TYPE	ENCLOSURE			
F1DN102 KVM-UN-4 (W/CAC)	2	1	Yes	317.5 x 162.6 x 63.5 mm	12 V, 2.5 A, DC	External with WW mains connectors	Extruded aluminum			
F1DN102 KVM-UNN-4	2	1	No							
F1DN202 KVM-UN-4 (W/CAC)	2	2	Yes							
F1DN202 KVM-UNN-4	2	2	No							
F1DN104 KVM-UN-4 (W/CAC)	4	1	Yes							
F1DN104 KVM-UNN-4	4	1	No	317.5 x 162.6 x 91.4 mm	12 V, 4.0 A, DC	Internal with WW mains connectors on power cord	Formed steel			
F1DN204 KVM-UN-4 (W/CAC)	4	2	Yes							
F1DN204 KVM-UNN-4	4	2	No							
F1DN108 KVM-UN-4 (W/CAC)	8	1	Yes	436.9 x 40.6 x 205.7 mm						
F1DN208 KVM-UN-4 (W/CAC)	8	2	Yes	436.9 x 88.9 x 205.7 mm						
F1DN116 KVM-UN-4 (W/CAC)	16	1	Yes							

**Security Accreditation:**  
NIAP Protection Profile PSD Ver. 4.0, Audio Input v 1.0., Keyboard/Mouse v 1.0. , Video/Display v 1.0 User Authentication (by model), TEMPEST variants available via an SDIP-55, NATO accredited TEMPEST test facility.

**Regulatory Compliance:**  
FCC Class A, CE, UL, ICES, RCM, RoHS, UKCA

**General Information**  
Designed in California. Assembled in USA with USA-based technical support (TAA compliant)

**Product Life-Cycle:** 5 years  
**Warranty:** 3 years standard (upgradeable to 4 or 5 years)

All Models

All models Compatible with Belkin sKVM Remote Control with Integrated keyboard, except F1DN116 KVM-UN-4

- Max Resolution Supported**  
3840 x 2160 pixels (UHD 4K) @ 60Hz  
2560 x 1600 pixels @ 120Hz
- Console Ports**  
Keyboard/Mouse USB Type-A female connector with status indicator lights  
(1 designated port for mouse and 1 designated port for keyboard)
- Audio Jack USB Mini (female)  
Remote Control RJ14 female  
CAC/DPP USB Type-A female connector  
Video DisplayPort/HDMI combo connector

**Computer Ports**  
Audio Jack 3.5mm female  
Keyboard/Mouse USB Type B  
Video Port DisplayPort/HDMI combo connector

**AC Input** 100–240VAC

**Temperature**  
Operating: 0° to 40° C  
Storage: -20° to 60° C

**Humidity**  
Storage & Use: 0-80% RH, non-condensing

**Weight** 0.25 kg (unit w/out cables)



Universal sKVM 2<sup>nd</sup> Generation


Accessories

PART NUMBER	INTEGRATED CONSOLE (VIDEO) CABLE
F1DN008KBD	Secure KVM Remote Control with Integrated Keyboard
F1D006	Desk mount for F1DN102KVM-UN-4, F1DN202KVM-UN-4, F1DN104KVM-UN-4 (and UNN variants)
F1D008	Desk mount for F1DN204KVM-UN-4 (and UNN variants)
F1DN-DCUAP-UN-4	Belkin PP4.0 sKVM to DCU Adapter
F1DN-KVM-CEXTC5	Belkin KVM Console Side CAT5 Extender-Universal Video
F1DN-KVM-HEXRC5	Belkin KVM Host Side CAT5 Extender-Universal Video
F1DN-KVM-CEXTFI	Belkin KVM Console Side Fiber Extender-Universal Video
F1DN-KVM-HEXRFI	Belkin KVM Host Side Fiber Extender-Universal Video
F1DN002R	4 Button DCU for 4 port Belkin Secure KVM Switches, with LCD Display
F1DN003R	3 Button DCU for 4-16 port Belkin Secure KVM Switches, with LCD Display

Universal sKVM 2<sup>nd</sup> Generation

Replacement Parts

PART NUMBER	INTEGRATED CONSOLE (VIDEO) CABLE
0401-00809	Belkin Universal 2- and 4-Port KVM/KM Power Adapter 12V 2.5A, with Interchangeable Mains Connector Wall Mount

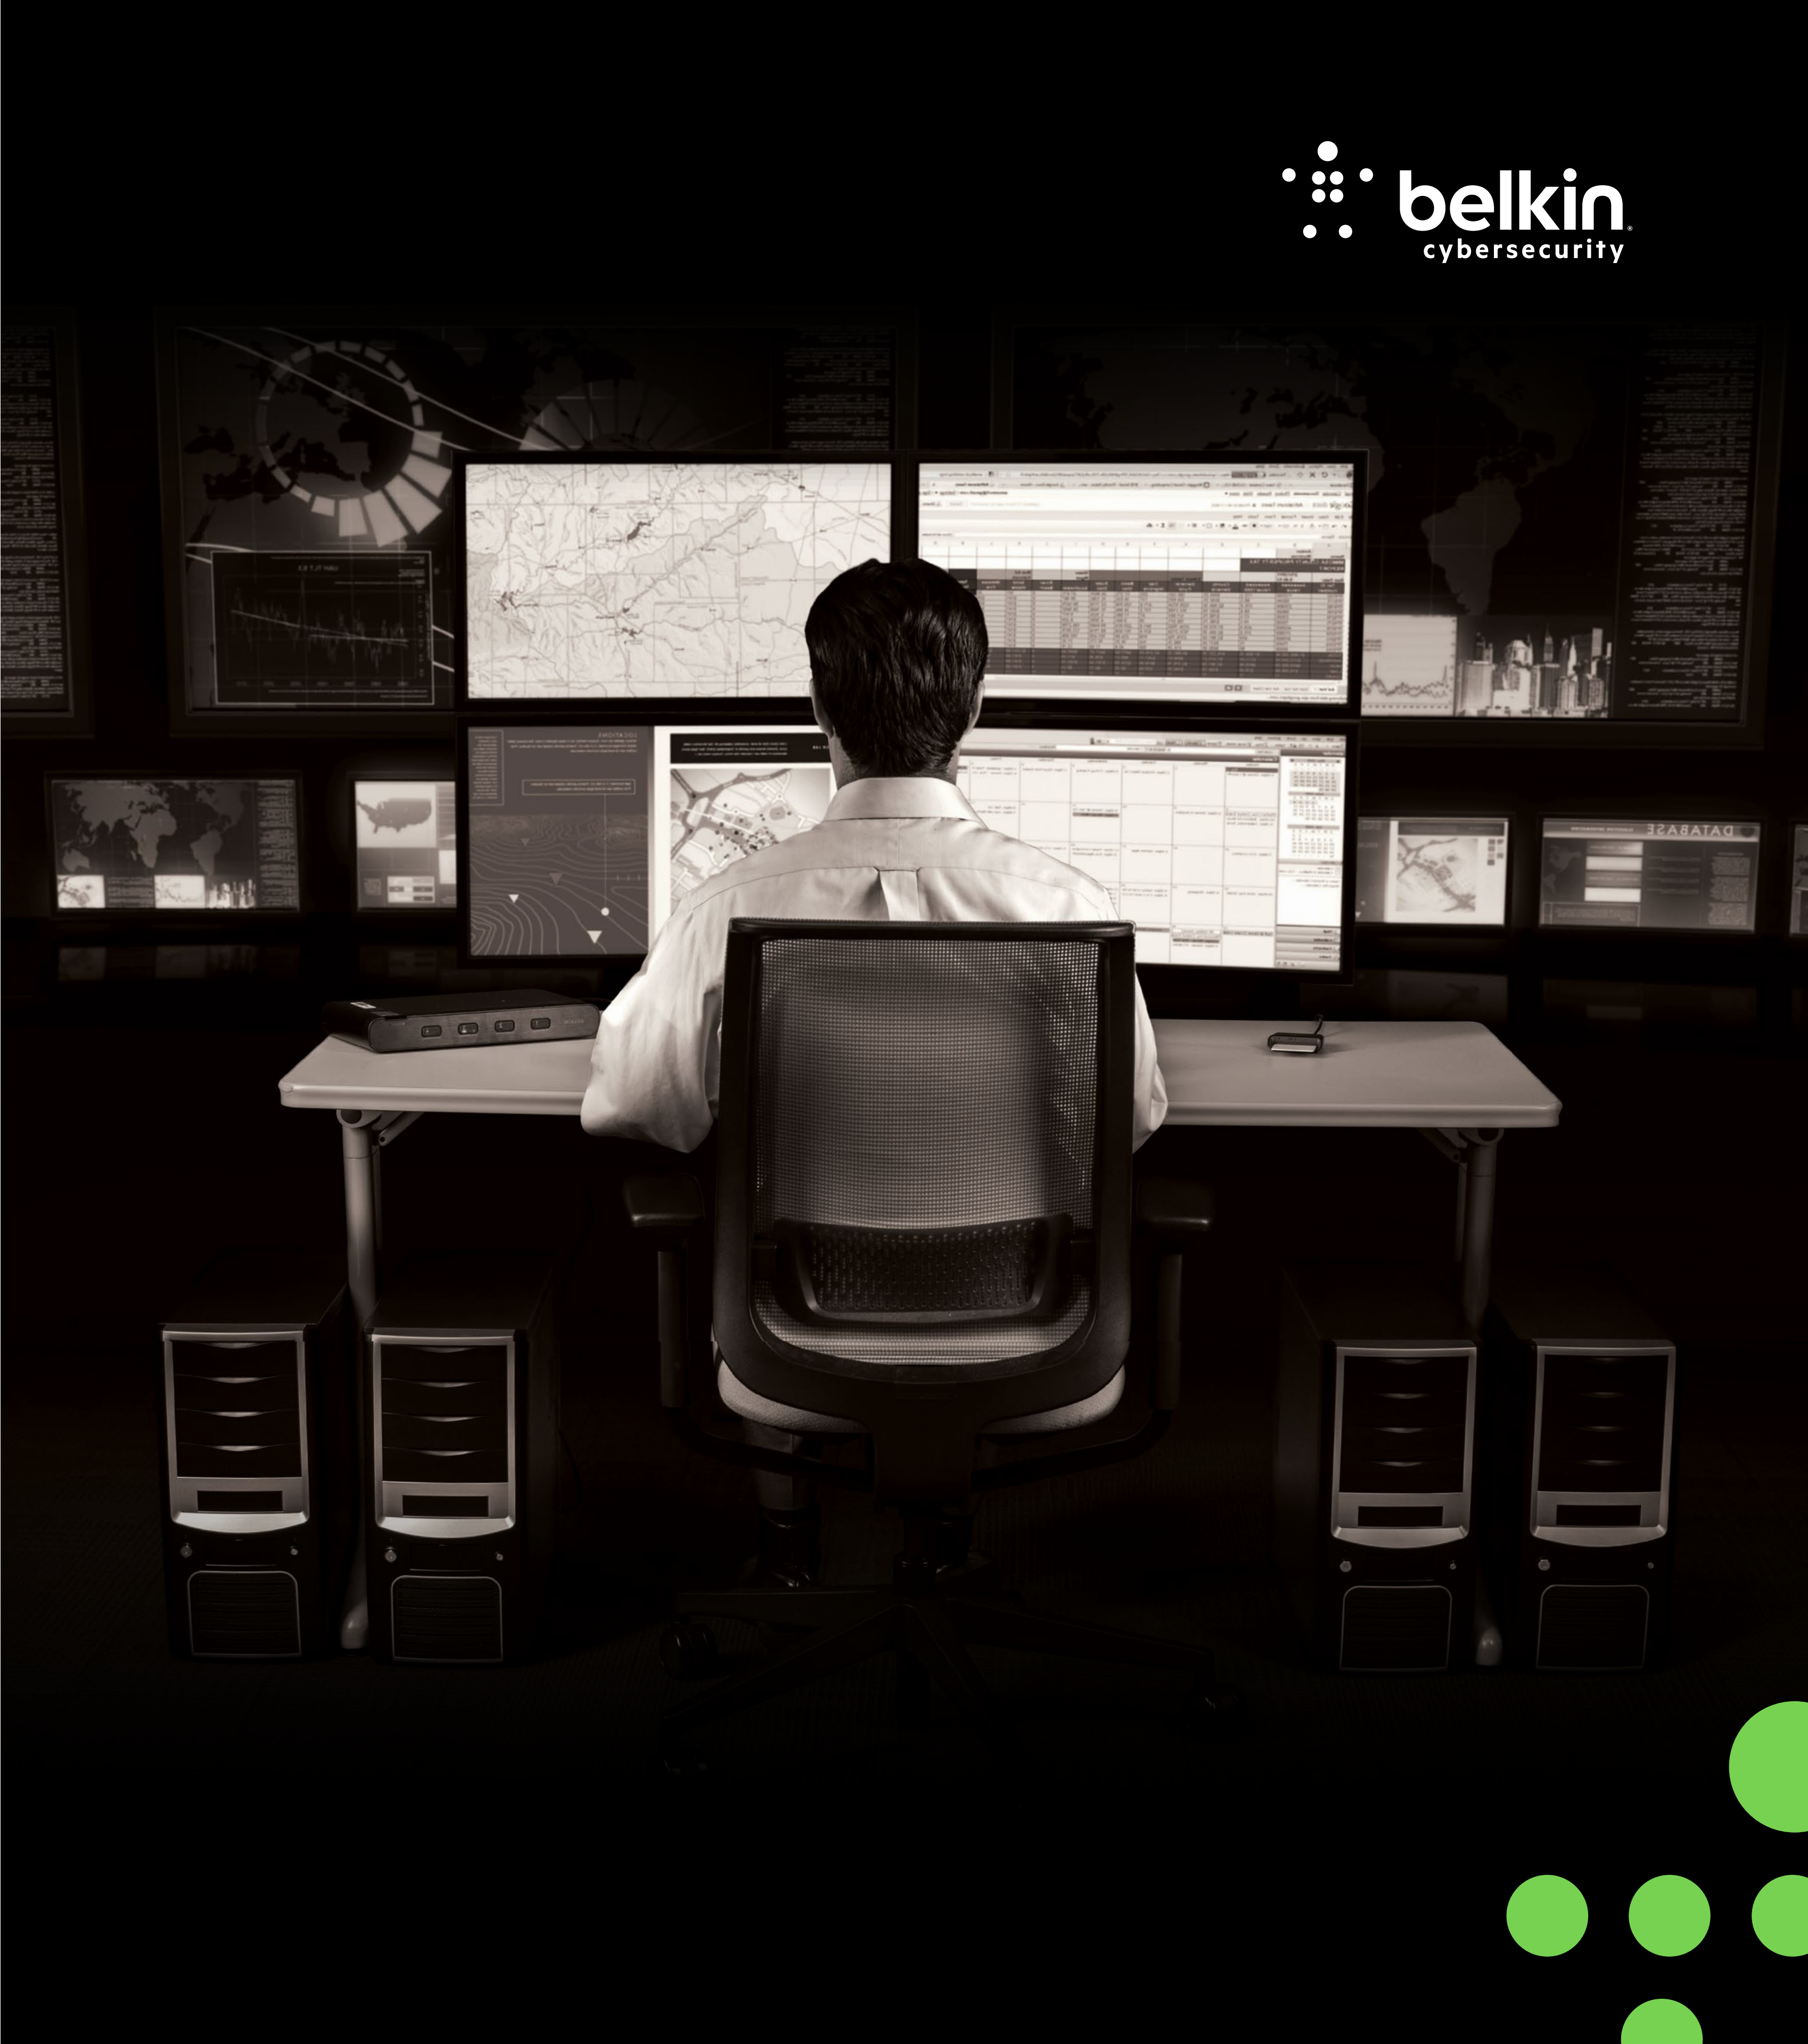



Universal sKVM 2<sup>nd</sup> Generation — Cables

Single-Output PC

Part Number	KVM PC Connection Combo Cables	M / M
F1D9019b06†	TAA DP/USB/Audio cable, DP–USB A/B	1,8 m
F1D9019b10†	TAA DP/USB/Audio cable, DP–USB A/B	3 m
F1DN1CCBL-MP6†	TAA mDP to DP/USB/Audio cable, Video–USB A/B	1,8 m
F1DN1CCBL-MP10†	TAA mDP to DP/USB/Audio cable, DP–mDP; USB A/B	3 m
F1DN1CCBL-HH6†	TAA HDMI/USB/Audio cable, HDMI–USB A/B	1,8 m
F1DN1CCBL-HH10†	TAA HDMI/USB/Audio cable, HDMI–USB A/B	3 m
F1DN1CCBL-DH6†	TAA DVI to HDMI/USB/Audio cable, Video–USB A/B	1,8 m
F1DN1CCBL-DH10†	TAA DVI to HDMI/USB/Audio cable, Video MM; USB A/B	3 m
F1DN1CCBL-CP6†	TAA USB-C to DP/USB/Audio cable, Video M; USB B	1,8 m
F1DN1CCBL-VH-10	VGA to HDMI/USB/Audio cable, VGA/HDMI MM, USB A/B	3 m
F1DN-NETPWR	TAA USB-C device ethernet network & charging adapter	

Dual-Output PC

Part Number	KVM PC Connection Combo Cables	
F1D9020b06†	TAA Dual DP/USB/Audio sKVM cable, DP USB A/B	1,8 m
F1D9020b10†	TAA Dual DP/USB/Audio sKVM cable, DP USB A/B	3 m
F1DN2CCBL-MP6†	TAA (2) mDP to DP/USB/Audio cable, Video USB A/B	1,8 m
F1DN2CCBL-MP10†	TAA (2) mDP to DP/USB/Audio cable, Video USB A/B	3 m
F1DN2CC-HHPP6†	TAA (1) HDMI-HDMI (1) DP-DP/USB/Audio cable	1,8 m
F1DN2CC-HHPP10†	TAA (1) HDMI-HDMI (1) DP-DP/USB/Audio cable	3 m
F1DN2CC-DHPP6†	TAA (1) DVI to HDMI (1) DP to DP/USB/Audio cable	1,8 m
F1DN2CC-DHPP10†	TAA (1) DVI to HDMI (1) DP to DP/USB/Audio cable	3 m
F1DN2CCBL-HH6†	TAA Dual HDMI/USB/Audio cable, HDMI USB A/B	1,8 m
F1DN2CCBL-HH10†	TAA Dual HDMI/USB/Audio cable, HDMI USB A/B	3 m
F1DN2CCBL-DH6†	TAA (2) DVI to HDMI/USB/Audio cable, VD MM; USB A/B	1,8 m
F1DN2CCBL-DH10†	TAA (2) DVI to HDMI/USB/Audio cable, VD MM; USB A/B	3 m
F1DN2CCBL-CP6†	TAA Dual USB-C to DP/USB/Audio cable Video M; USB B	1,8 m
F1DN-NETPWR	TAA USB-C Device Ethernet Network & Charging Adapter	0,9 m



Universal sKVM 2<sup>nd</sup> Generation — Cables

Video Cables

PART NUMBER	TAA sKVM to MONITOR VIDEO CABLES	M / M
F1DN1VCBL-PP6†	DisplayPort to DisplayPort	1,8 m
F1DN1VCBL-PP10†	DisplayPort to DisplayPort	3 m
F1DN1VCBL-MP6†	mini-DisplayPort to DisplayPort	1,8 m
F1DN1VCBL-MP10†	mini-DisplayPort to DisplayPort	3 m
F1DN1VCBL-HH6†	HDMI to HDMI	1,8 m
F1DN1VCBL-HH10†	HDMI to HDMI	3 m
F1DN1VCBL-DH6†	HDMI to DVI	1,8 m
F1DN1VCBL-DH10†	HDMI to DVI	3 m

Accessory Cables

PART NUMBER	DESCRIPTION	
F1D9013b06†	TAA USB-A to USB-B Cable for <b>CAC Reader</b>	1,8 m
F1D9013b10†	TAA USB-A to USB-B Cable for <b>CAC Reader</b>	3 m
F1D9022b06†	TAA USB <b>Keyboard/Mouse/Audio Combo Cable</b>	1,8 m
F1D9022b10†	TAA USB <b>Keyboard/Mouse/Audio Combo Cable</b>	3 m
F1D9026-50	RJ25 <b>Extension for DCU</b>	15,25 m





## Who we are

At Belkin International, we create products that help people realise the power of technology and make people's lives better, easier, and more fulfilling. This has been Belkin's mission since our inception in 1983.

As a leading provider of secure KVM switches for mission-critical applications, we positively impact and improve worker efficiency by delivering innovation and peace of mind to users working across multiple security enclaves.

Our offer is certified to the latest Common Criteria NIAP Protection Profile for Peripheral Sharing Devices version 4.0 along with all applicable modules.



## The Belkin difference



**Hassle-free replacement**



**3-Year Warranty with optional extension of 1-2 years**

**Exclusively produced in the USA with TAA-compliant accessories**

## Contact

For additional product, pricing or general information contact:

Belkin B.V.  
Herikerbergweg 106, Plaza Arena – Jupiter,  
1101 CM Amsterdam, The Netherlands



**SUPPORT:** Go to [phone-support](#)

**SALES:** [CyberSecurityEurope@belkin.com](mailto:CyberSecurityEurope@belkin.com)

[belkin.com/uk/resource-center/cybersecurity/](https://belkin.com/uk/resource-center/cybersecurity/)